

RADIAL CHOKE COIL


SERIE: BCR1620 20,0 x 16,0 mm

DIMENSIONS:

VPE: 100pcs. Try




RoHS Compl

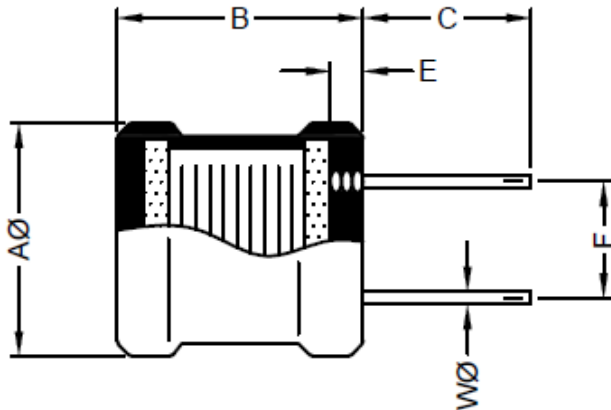

Unit:m/m

AØ	B	C	E	F	WØ
16.0 Max.	20.0 Max.	15.0±5.0	3.0 Max.	8.0±1.5	1.0±0.1


SCHEMATIC:



GENERAL SPECIFICATION :

1. The inductance drop at rated is 10% max.
2. Temp. rise. 40°C max. at rated current.
3. Storage temp.: -40°C.....+125°C
4. Operating temp.: -40°C.... +85°C

MATERIALS:

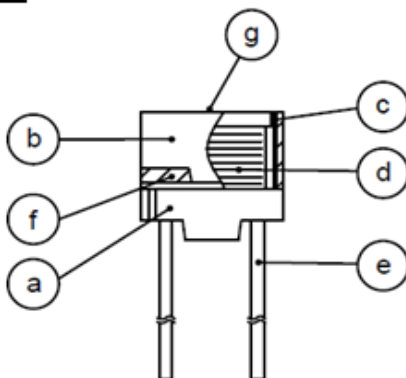

- (a) DR CORE
- (b) RI CORE
- (c) SLEEVE
- (d) WIRE
- (e) LEAD
- (f) ADHESIVE
- (g) INK

NOTE : Specifications subject to change without notice. Please check our website for latest information

RADIAL CHOKE COIL

SERIE: BCR1620 20,0 x 16,0 mm



COILS ■ ELEKTRONIK ■ TRANSFORMERS

ELECTRICAL CHARACTERISTICS

Part. No	Inductance (μ H) 20%	Test Frequency (Hz)	RDC (Ω) Max.	IDC (A) Max.
BCR1620 - 100SWE	10	1V/1K	0,024	5,0
BCR1620 - 250SWE	25	1V/1K	0,040	4,0
BCR1620 - 500SWE	50	1V/1K	0,060	3,0
BCR1620 - 101SWE	100	1V/1K	0,090	2,0
BCR1620 - 251SWE	250	1V/1K	0,180	1,5
BCR1620 - 501SWE	500	1V/1K	0,400	1,0
BCR1620 - 102SWE	1000	1V/1K	0,800	0,7

NOTE : Specifications subject to change without notice. Please check our website for latest information.