

RADIAL CHOKE COIL


SERIE: REP0605 6,0 x 5,0 mm

DIMENSIONS:

VPE: 200 pcs. BOX




RoHS Compliant

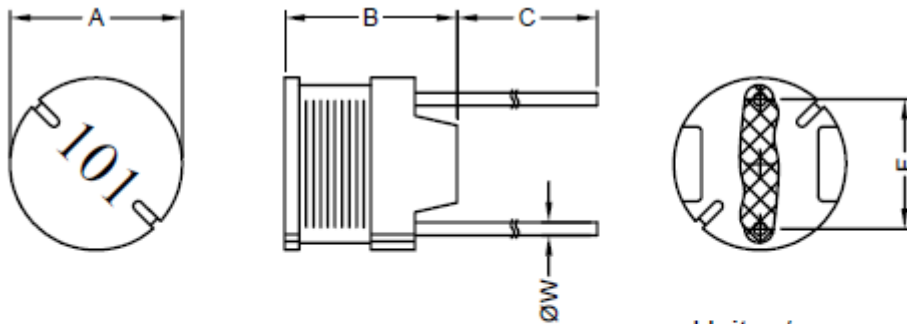

Unit:m/m

A	B	C	F	ØW
6.0±0.5	5.0 Max.	20.0±5.0	4.0±0.5	0.50±0.10


SCHEMATIC:



GENERAL SPECIFICATION :

1. The inductance drop at rated is 10% max.
2. Temp. rise. 40°C max. at rated current.
3. Storage temp. : -40°C.....+105°C
4. Operating temp.: -40°C.... +85°C

MATERIALS:



- (a) Core : DR Ferrite Core
- (b) Wire : Enamelled Copper Wire
- (c) Lead : Tinned Copper Wire
- (d) Adhesive : Epoxy
- (e) Ink : Bon Margue

NOTE : Specifications subject to change without notice. Please check our website for latest information

RADIAL CHOKE COIL

SERIE: REP0605 6,0 x 5,0 mm



ELECTRICAL CHARACTERISTICS

Part. No.	Inductance (uH)		Test Frequency (Hz)	RDC (Ω)	IDC (A)
-----------	-----------------	--	----------------------	------------------	---------

REP0605 - 220SWE	22	10%	2,52M	0,18	0,90
REP0605 - 270SWE	27	10%	2,52M	0.21	0,81
REP0605 - 330SWE	33	10%	2,52M	0,27	0,74
REP0605 - 390SWE	39	10%	2,52M	0,29	0,68
REP0605 - 470SWE	47	10%	2,52M	0,34	0,62
REP0605 - 560SWE	56	10%	2,52M	0,42	0,57
REP0605 - 860SWE	68	10%	2,52M	0,48	0,51
REP0605 - 820SWE	82	10%	2,52 M	0,55	0,47
REP0605 - 101SWE	100	10%	1K	0,68	0,42
REP0605 - 121SWE	120	10%	1K	0,77	0,39
REP0605 - 151SWE	150	10%	1K	0,95	0,35
REP0605 - 181SWE	180	10%	1K	1,15	0,32
REP0605 - 221SWE	220	10%	1K	1,30	0,29
REP0605 - 271SWE	270	10%	1K	1,55	0,26
REP0605 - 331SWE	330	10%	1K	2,18	0,23
REP0605 - 391SWE	390	10%	1K	2,47	0,21
REP0605 - 471SWE	470	10%	1K	2,92	0,20
REP0605 - 561SWE	560	10%	1K	3,92	0,18
REP0605 - 681SWE	680	10%	1K	4,57	0,16
REP0605 - 821SWE	820	10%	1K	5,28	0,15
REP0605 - 102SWE	1000	10%	1k	7,06	0,13

NOTE : Specifications subject to change without notice. Please check our website for latest information.