

RADIAL CHOKE COIL


SERIE: REP0809 7,8 x 9,5 mm

DIMENSIONS:

VPE: 200 Box



RoHS Compliant

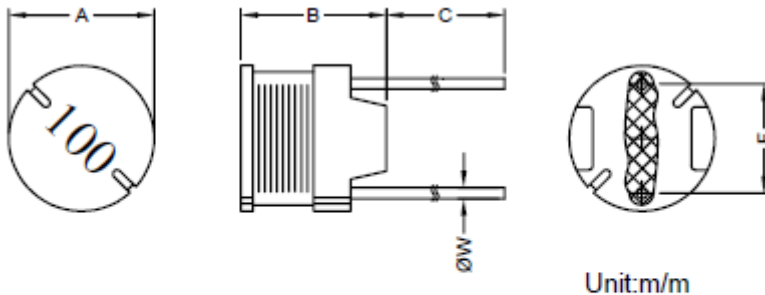

Unit:m/m

A	B	C	F	ØW
7.80±0.5	9.5 Max.	15.0±3.0	5.0±0.5	0.65±0.10


SCHEMATIC:



GENERAL SPECIFICATION :

1. The inductance drop at rated is 10% max.
2. Temp. rise. 40°C max. at rated current.
3. Storage temp.: -40°C.....+105°C
4. Operating temp.: -40°C.... +85°C

MATERIALS:

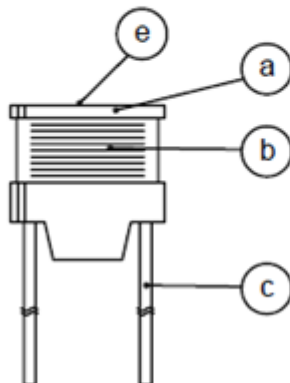

- (a) Core : DR Ferrite Core
- (b) Wire : Enamelled Copper Wire
- (c) Lead : Tinned Copper Wire
- (d) Adhesive : Epoxy
- (e) Ink : Bon Margue

NOTE : Specifications subject to change without notice. Please check our website for latest information

RADIAL CHOKE COIL

SERIE: REP0809 7,8 x 9,5 mm



ELECTRICAL CHARACTERISTICS

Part. No.	Inductance (uH)		Test Frequency (Hz)	RDC (Ω)	IDC (A)
-----------	-----------------	--	---------------------	---------	---------

REP0809 - 100SWE	10	10%	2,52M	0,04	2,60
REP0809 - 120SWE	12	10%	2,52M	0,04	2,60
REP0809 - 150SWE	15	10%	2,52M	0,05	2,10
REP0809 - 180SWE	18	10%	2,52M	0,05	2,00
REP0809 - 220SWE	22	10%	2,52M	0,06	1,70
REP0809 - 270SWE	27	10%	2,52M	0,06	1,60
REP0809 - 330SWE	33	10%	2,52M	0,07	1,40
REP0809 - 390SWE	39	10%	2,52 M	0,08	1,40
REP0809 - 470SWE	47	10%	2,52 M	0,10	1,30
REP0809 - 560SWE	56	10%	2,52 M	0,11	1,20
REP0809 - 680SWE	68	10%	2,52 M	0,14	1,10
REP0809 - 820SWE	82	10%	2,52 M	0,16	1,00
REP0809 - 101SWE	100	10%	1K	0,19	0,90
REP0809 - 121SWE	120	10%	1K	0,22	0,82
REP0809 - 151SWE	150	10%	1K	0,27	0,74
REP0809 - 181SWE	180	10%	1K	0,31	0,71
REP0809 - 221SWE	220	10%	1K	0,38	0,64
REP0809 - 271SWE	270	10%	1K	0,53	0,57
REP0809 - 331SWE	330	10%	1K	0,61	0,51
REP0809 - 391SWE	390	10%	1K	0,69	0,48
REP0809 - 471SWE	470	10%	1k	0,89	0,43
REP0809 - 561SWE	560	10%	1k	1,01	0,40
REP0809 - 681SWE	680	10%	1k	1,18	0,35
REP0809 - 821SWE	820	10%	1k	1,57	0,32
REP0809- 102SWE	1000	10%	1k	1,84	0,30

NOTE : Specifications subject to change without notice. Please check our website for latest information.